## thermo scientific

## Technical Data Sheet Thermo Scientific 5.5 Cuft Explosion Proof Refrigerator


Revision-1

## Thermo Fisher Scientific, Asheville, North Carolina


	Thermo Fisher Scientific, Ash	-	
	Catalog I		
Specifications	TSH05	RESA	
	Production Me	odel Number	
	TSH05RESA Application, Rating And Electrical Data		
Application	5.5 Cuft Explosion Proof Refrigerator		
Storage Volume	5.5 Cuft / 155.7 Liters		
Temperature Rating	1°C to 12°C		
Electrical Power	120 V / 60 z		
Instrument Rated Current	0.8A		
Building Supply Rating	120v± 10%Volt		
Power Plug	Not Provided		
Agency Listings	cULus		
Sound Pressure Level	32.2dBA		
Indoor/Outdoor Usage	Indoor Use Only		
Application Environment	Class I, Group C and D Environment		
Ambient Operating Temperature	15° C - 32° C (60° F - 90° F)		
Ambient operating remperature	Refrigeration Configuration		
Refrigeration System	Vapor Compression System		
Compressor / Number	Hermetic Compression System		
Condenser Type/Number	Finned Tube and Natural Convection Cooled		
Expansion Device	Capillary Tube		
Evaporator Type	Foamed In Evaporator		
Defrost Method	Manual Defrost		
Refrigerant Charge/Flammability	R600a/Flammable		
rteingerant enarge/r lammability			
Power Switch	Controller/Electrical System Configuration And Features Not Present		
Controller Type	Mechanical Thermostat		
	No		
Setpoint Security / Programmable Compressor Safe Guard	No High Temp Cutout Switch / Overload Protector		
Control Sensor			
	Capillary tube Not Present		
Remote Alarm Terminals	Not Present		
Power Failure Alarm			
Data Logger / Chart Recorder	Not Present Dimensions And Construction		
Interior Dimensions (H x W x D)	27.75" x 20" x 17.5" (70.5 x 50.8 x 44.5 cm)		
Exterior Dimensions (H x W x D)	33.5" x 23.63" x 29" (85 x 60 x 73.6 cm)		
Insulation	Cyclopentane		
Door Perimeter heater	No		
Shelves / Capacity	(3) Adjustable Shelves		
All-Direction Casters	2 Adjustable Leveling Feet		
Shipping Weight	120 lbs/ 54.4 kg		
Access Port / Dia	No		
	Typical Performance		
5.5 Cuft EXP Refrigerator	5.5 Cuft EXP Refrigerator	Test unit MSO number	20029-B-8-1
		Cabinet Load	Unloaded
25			3.86
25		Average Cabinet Temp at 20C ambient at default setting (C)	5.00
25		Average Cabinet Temp at 20C ambient at default setting (C) Peak Variation (C)	5.12
	15		
20	15	Peak Variation (C)	5.12
20		Peak Variation (C) Uniformity (C)	5.12 3.03
20	15	Peak Variation (C) Uniformity (C) Stability (C)	5.12 3.03 1.69
20 15	15	Peak Variation (C) Uniformity (C) Stability (C) 1-min Door Opening Recovery time (min) Duty Cycle (%)	5.12 3.03 1.69 5
20 15	15	Peak Variation (C) Uniformity (C) Stability (C) 1-min Door Opening Recovery time (min) Duty Cycle (%) Cycle (On/Off)rate at default setting (min)	5.12 3.03 1.69 5 19% 5/21
20 15		Peak Variation (C) Uniformity (C) Stability (C) 1-min Door Opening Recovery time (min) Duty Cycle (%) Cycle (On/Off)rate at default setting (min) Energy Consumption (kW-hr/day)	5.12 3.03 1.69 5 19% 5/21 0.34
20 15	15 16 17 10 10 10 10 10 10 10 10 10 10	Peak Variation (C) Uniformity (C) Stability (C) 1-min Door Opening Recovery time (min) Duty Cycle (%) Cycle (On/Off)rate at default setting (min)	5.12 3.03 1.69 5 19% 5/21

© 2020 Thermo Scientific. All trademarks are the property of Thermo Scientific and its subsidiaries. Specifications, terms and pricing are subject

to change. Not all products are available in all countries. Please consult your local sales representative for details.

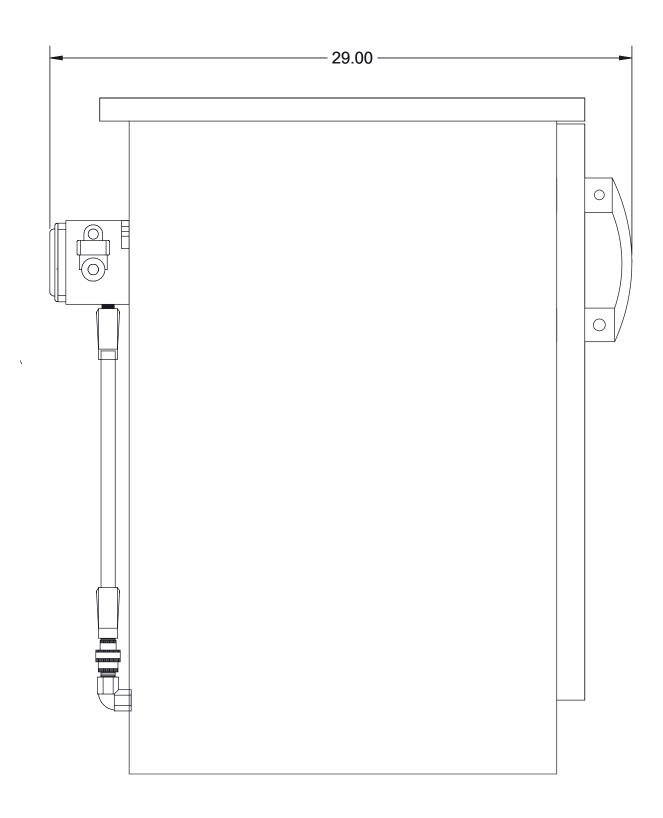



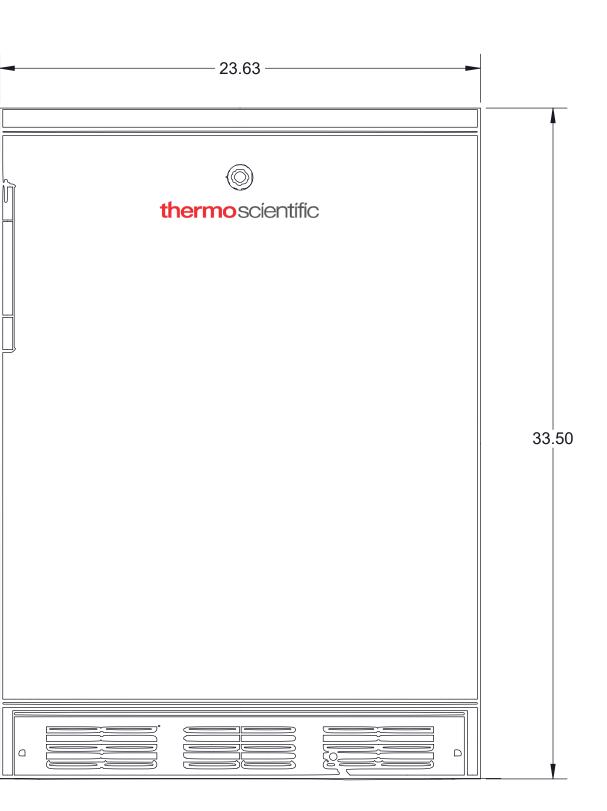

5.5 Cu.Ft. EXPLOSION PROOF REFRIGERATOR